



■ Dimensions (AGMA Standard)

Jac-GD

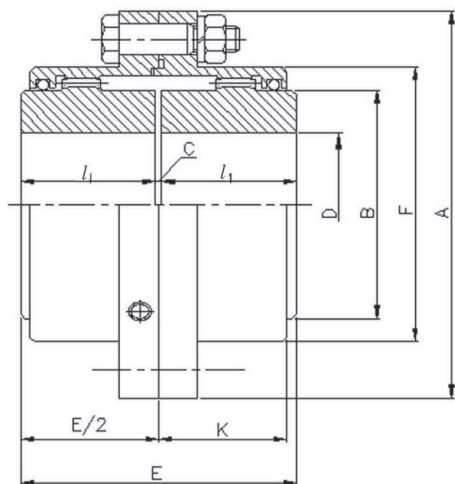

Jac-GDL

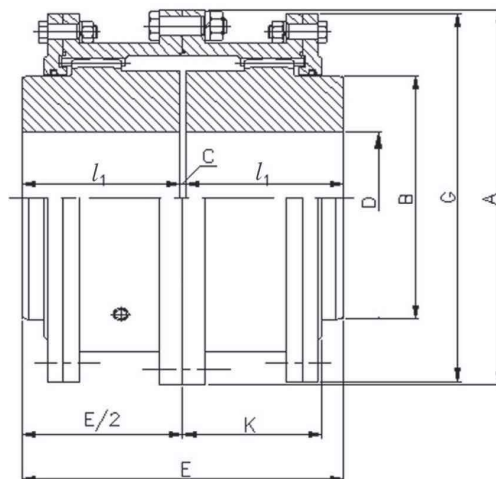

Size	HP Per 100 rpm	Max. Speed (rpm)	Basic Torque (kgf · cm)	Bore D(mm)		Dimensions(mm)							Weight (kg)	Grease wt(kg)	
				Max	Min	A	E	l ₁	B	F	K	G			C
10GD	12	8,000	8,594	48	13	116	89	43	69	84	39		3	4.5	0.04
15GD	27	6,500	19,337	60	19	152	101	49	86	105	48		3	9.1	0.07
20GD	50	5,600	35,810	73	25	178	127	62	105	126	59		3	15.9	0.11
25GD	90	5,000	64,458	92	32	213	159	77	131	155	72		5	29.5	0.23
30GD	150	4,400	107,430	105	38	240	187	91	152	180	84		5	43.1	0.36
35GD	230	3,900	164,726	124	51	279	218	106	178	211	98		6	68.0	0.54
40GD	350	3,600	250,670	146	64	318	248	121	210	245	111		6	97.5	0.91
45GD	480	3,200	343,776	165	76	346	278	135	235	274	123		8	136.1	1.04
50GD	650	2,900	465,530	178	89	389	314	153	254	306	141		8	190.5	1.77
55GD	850	2,650	608,770	197	102	425	344	168	279	334	158		8	249.5	2.22
60GD	1,100	2,450	787,820	222	114	457	384	188	305	366	169		8	306.2	3.18
70GDL	1,600	2,150	1,145,920	254	89	527	451.5	221	343		196	517	9.5	485.4	4.35
80GDL	2,100	1,750	1,504,020	279	102	591	507.5	249	356		243	572	9.5	703.1	9.53
90GDL	2,850	1,550	2,041,170	305	114	660	565	276	394		265	641	13	984.3	12.25
100GDL	4,000	1,450	2,864,800	343	127	711	623	305	445		294	699	13	1302.0	14.97
110GDL	5,500	1,330	3,939,400	387	140	775	679	333	495		322	749	13	1678.3	17.69
120GDL	7,000	1,200	5,013,400	425	152	838	719	353	546		341	826	13	2113.8	20.87