


## KSE Type

### Standard Flanged Sleeve Single Engagement

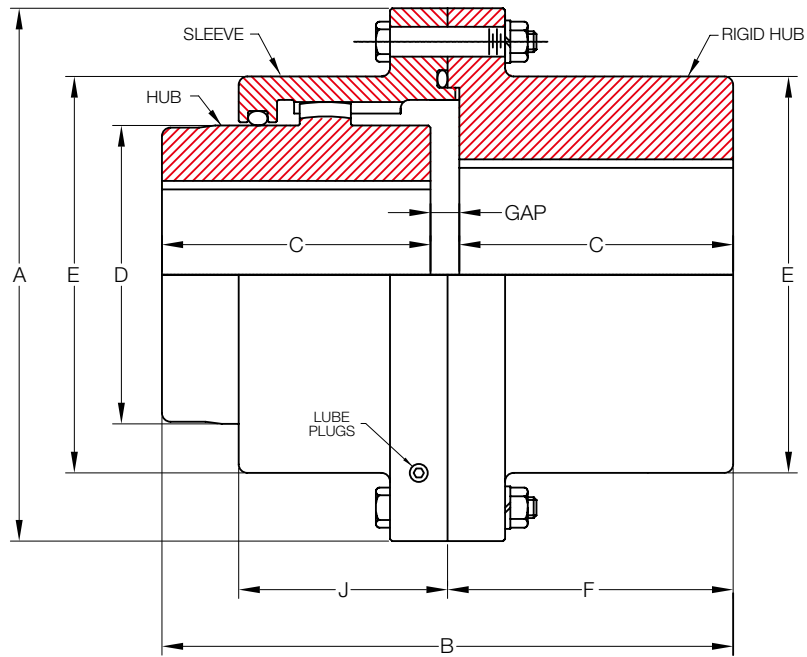

Size	Torque Rating (Nm)	Allow Speed RPM	Max Bore		Min Bore (mm)	Cplg Weight (Kg)	Lube Weight (Kg)	Dimensions (Millimeters)								KSEH Torque (Nm)
			Flex (mm)	Rigid (mm)				A	B	C	D	E	F	J	GAP	
112	560	4,000	40	50	16	4.6	0.04	112	108	50	58	79	54	40	8	960
125	1,050	4,000	50	56	31	6.7	0.05	125	134	63	70	92	67	43	8	1,650
140	1,510	4,000	56	63	31	9.3	0.07	140	150	71	80	107	75	47	8	2,490
160	2,310	4,000	65	75	31	14.0	0.09	160	170	80	95	120	85	52	10	3,900
180	3,550	4,000	75	80	45	19.0	0.12	180	190	90	105	134	95	56	10	5,940
200	5,060	3,810	85	95	45	26.0	0.15	200	210	100	120	149	105	61	10	8,290
224	7,350	3,410	100	105	51	38.0	0.25	224	236	112	145	174	118	65	12	14,140
250	9,920	3,050	115	125	51	56.0	0.35	250	262	125	165	200	131	74	12	20,450
280	17,170	2,720	135	150	51	83.0	0.48	280	294	140	190	224	147	82	14	29,170
315	27,070	2,420	160	180	112	135.0	0.77	315	356	170	225	260	178	98	16	38,270
355	39,880	2,150	180	200	125	184.0	0.94	355	396	190	250	288	198	108	16	56,450
400	56,000	1,900	200	236	140	261.0	1.36	400	418	200	285	329	209	114	18	88,890

\* Coupling Weight is without Bore Machining