


Dimensions

AGMA STANDARD

- PG32(G32 Type Spacer Coupling Double Engagement)

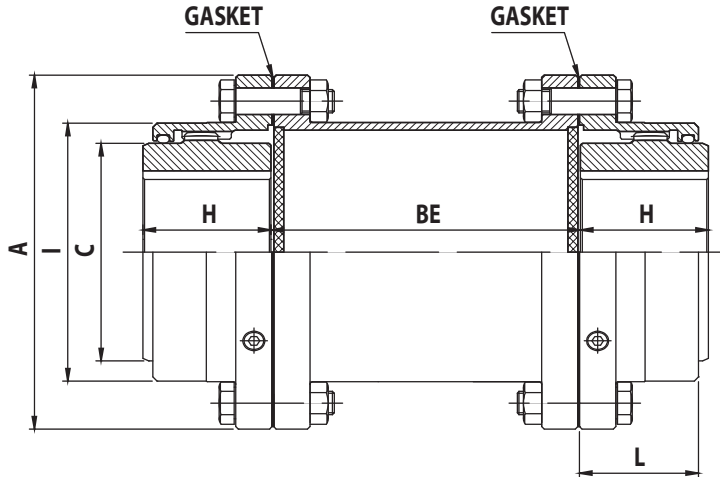

SIZE	MAX SPEED (RPM)	BASIC TORQUE (Nm)	Bore Dia (mm)		Dimensions(mm)							CPLG Weight (Kg)	LUBE WT (Kg)
			MAX	MIN	BE		A	C	H	I	L		
					MIN	MAX							
1010PG32	7000	842	48	13	83	311	115.9	69	43	83.8	39	6.8	0.04
1015PG32	5500	1,895	60	19	83	311	152.4	86	49	105.2	48	13.6	0.07
1020PG32	4600	3,509	73	25	83	311	177.8	105	62	126.5	59	20.4	0.11
1025PG32	4000	6,317	92	32	95	311	212.7	131	77	154.9	72	38.6	0.23
1030PG32	3600		105	38	95	311	239.7	152	91	180.3	84	54.4	0.36
1035PG32	3100	16,143	124	51	120	311	279.4	178	106	211.3	98	88.5	0.54
1040PG32	2800	24,566	146	64	120	311	317.5	210	121	245.4	111	122.5	0.91
1045PG32	2600	33,690	165	76	120	311	346.1	235	135	274.1	123	165.6	1.04
1050PG32	2400	45,622	178	89	146	311	388.9	254	153	305.8	141	238.1	1.77
1055PG32	2200	59,659	197	102	146	311	425.4	279	168	334.3	158	306.2	2.22
1060PG32	2100	77,206	222	114	146	311	457.2	305	188	366.0	196	358.3	3.18
1070PG32	1800	112,300	254	127	146	311	527.0	356	221	424.9	196	562.5	4.35


※ Coupling weight is measured without bore amachining.

※ Application of spacer

1. When it is impossible to connect HUBs due to long distance between shaft ends.
2. When it is necessary to prevent transmitting heat and electric currency.

※ 'BE' means the distance between shaft ends. Please notice 'BE' value to the manufacturer, when you order this item.

• PG52F(G52 Type Floating Shaft)

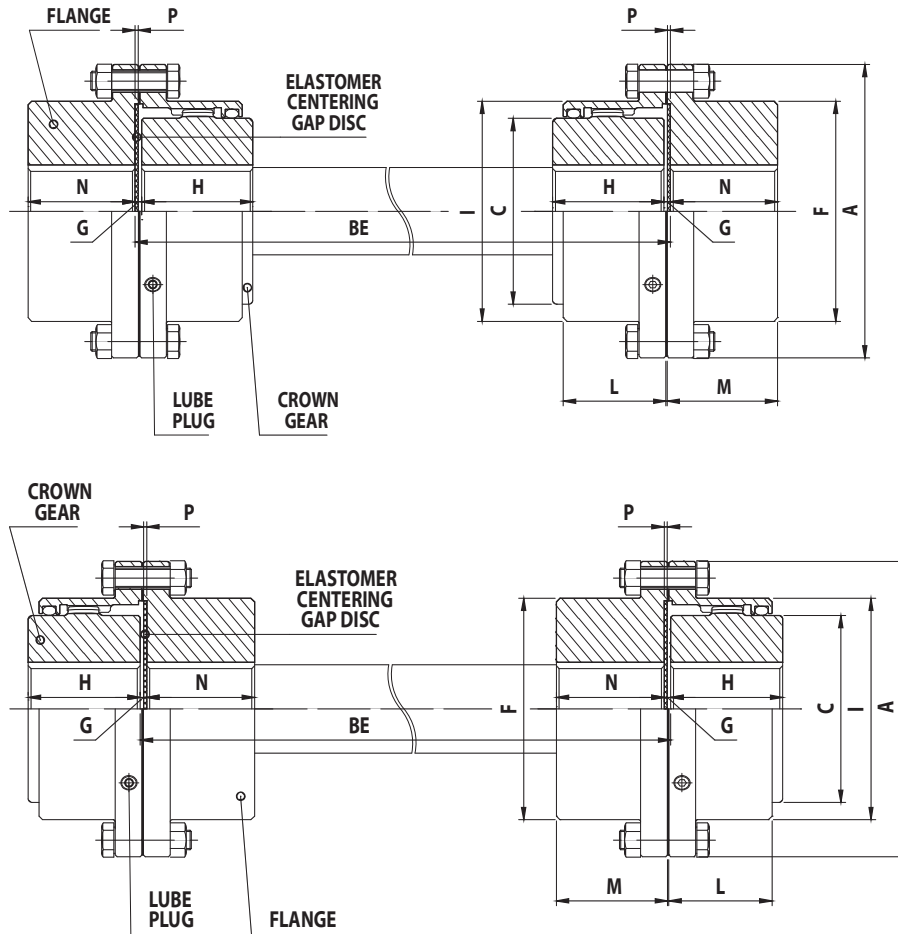

SIZE	MAX SPEED (RPM)	BASIC TORQUE (Nm)	Bore Dia (mm)			Dimensions(mm)													CPLG Weight (Kg)	LUBE WT (Kg)
			MAX	MIN	BE MIN		A	C	F	H	I	L	M	N	P	G				
					C	F											GFS-R	GFS-O		
1010PG52F	8000	842	48	60	13	92	133	115.9	69	83.8	43	83.8	39	41.5	40	2.5	4	4.5	0.02	
1015PG52F	6500	1,895	60	75	19	105	159	152.4	86	105.2	49	105.2	48	47.5	46	2.5	4	9.1	0.04	
1020PG52F	5600	3,509	73	92	25	129	197	177.8	105	126.5	62	126.5	59	60.0	58	2.5	4	15.9	0.07	
1025PG52F	5000	6,317	92	111	32	162	241	212.7	131	154.9	77	154.9	72	76.5	74	2.5	5	27.2	0.12	
1030PG52F	4400	10,528	105	130	38	189	279	239.7	152	180.3	91	180.3	84	90.5	88	2.5	5	43.1	0.18	
1035PG52F	3900	16,143	124	149	51	219	324	279.4	178	211.3	106	211.3	98	105.0	102	2.5	5.5	68.0	0.27	
1040PG52F	3600	24,566	146	171	64	248	419	317.5	210	245.4	121	245.4	111	118.0	115	4.1	7	99.8	0.47	
1045PG52F	3200	33,690	165	194	76	281	508	346.1	235	274.1	135	274.1	123	135.0	131	4.1	8	136.1	0.57	
1050PG52F	2900	45,622	178	222	89	316	533	388.9	254	305.8	153	305.8	141	151.0	147	5.1	8	195	0.91	
1055PG52F	2650	59,659	197	248	102	367	572	425.4	279	334.3	168	334.3	158	177.0	173	5.1	8	263.1	1.13	
1060PG52F	2450	77,206	222	267	114	397	597	457.2	305	366.0	188	366.0	169	190.0	186	6.6	8	324.3	1.7	
1070PG52F	2150	112,300	254	305	89	470	673	527.0	343	424.9	221	424.9	196	226.5	220	8.4	13	508	2.27	