


T31, T35

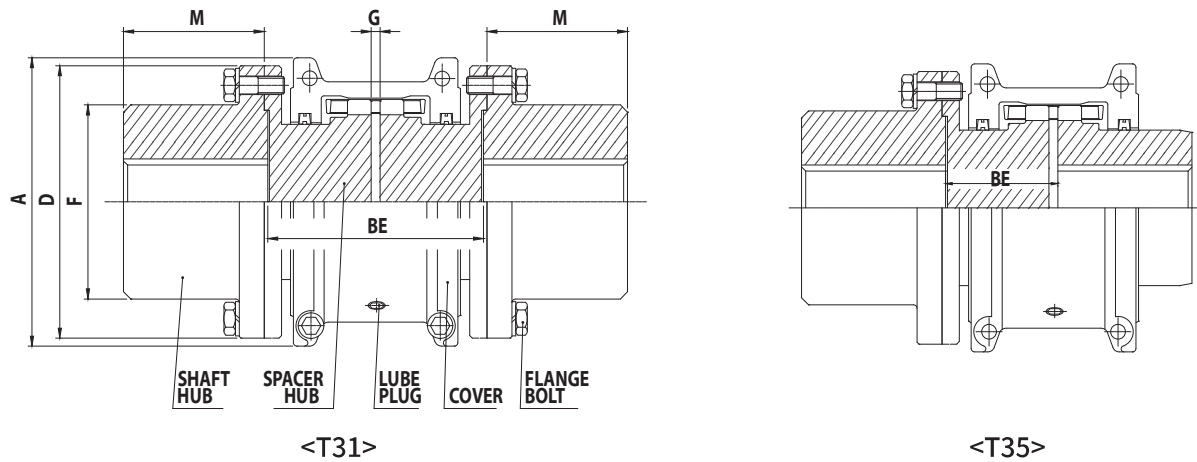

SIZE	MAX SPEED (RPM)	BASIC TORQUE (Nm)	BORE DIA (mm)		DIMENSIONS(mm)										Flange Bolt No.	LUBE WT (kg)
			Max	Min	A	BE(T31)		BE(T35)		D	F	M	G			
						Min	Max	Min	Max							
1020	3600	48	36	12.7	97	89	203	45	102	86	52	35	5	4	0.03	
1030	3600	135	44	12.7	106.1	89	216	45	109	94	59	41	5	8	0.03	
1040	3600	226	57	12.7	114.6	89	216	45	109	113	78	54	5	8	0.05	
1050	3600	395	64	12.7	135.6	112	216	57	109	126	87	59.5	5	8	0.05	
1060	3600	621	79	19.1	148.1	127	330	64	166	145	103	73	5	8	0.09	
1070	3600	904	83	19.1	158.6	127	330	64	166	153	109	79	5	12	0.11	
1080	3600	1864	95	27	190.3	184	406	93	204	178	122	89	5	12	0.17	
1090	3600	3389	108	27	210.5	184	406	93	204	210	142	102	5	12	0.25	
1100	2400	5704	127	38.1	251	203	406	103	205	251	171	89	6.5	12	0.43	
1110	2250	8472	149	50.8	269.5	210	406	106	205	277	196	103	6.5	12	0.51	
1120	2025	12425	165	63.5	308.7	246	406	125	205	319	225	118.5	9.5	12	0.73	
1130	1800	18072	178	76.2	346.8	257	406	130	205	346	238	135	9.5	12	0.91	
1140	1650	25980	203	88.9	384.8	267	406	135	205	386	266	152	9.5	12	1.13	
1150	1500	36145	254	101.6	453.54	345	371	175	187	425	334	173	9.5	14	1.95	
1160	1350	50830	279	114.3	503	356	406	180	205	457	366	186	9.5	14	2.81	
1170	1225	67773	330	127	568.4	384	445	194	224	527	425	220	9.5	16	3.49	
1180	1100	93979	330	101.6	631.6	400	490	202	247	591	451	249	9.5	16	3.76	
1190	1050	124251	362	114.3	677	411	530	207	267	660	508	276	9.5	18	4.4	
1200	900	169433	381	127	760	445	575	224	289	711	530	305	9.5	18	5.62	

※ BE means the distance between shaft ends. Please notice manufacturer BE value, when customer order this item.