



ROTEX® Standard Flexible jaw couplings

Materials: aluminium + cast + sinter material

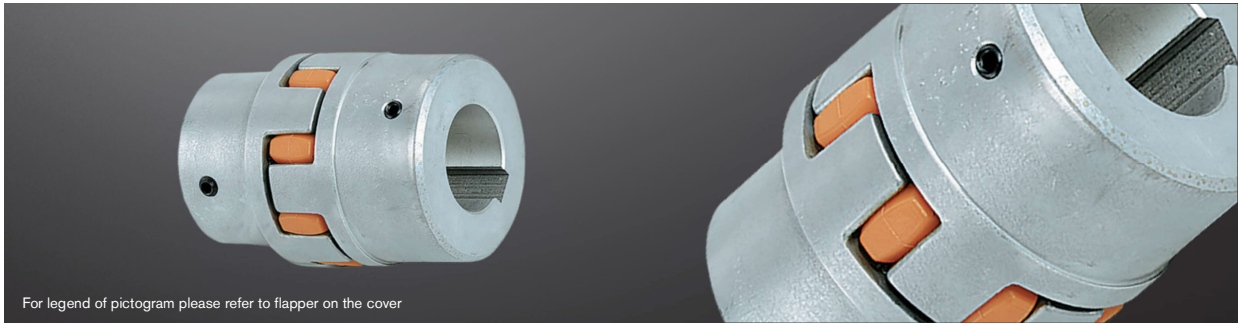

For legend of pictogram please refer to flapper on the cover



ROTEX® Sintered steel (Sint)																			
Size	Component	Spider ¹⁾ (component 2) Rated torque [Nm]			Finish bore D (min. - max.)	Dimensions [mm]											Setscrew		
		92 ShA	98 ShA	64 ShD		General											G	T	T _A [Nm]
						L	L1, L2	E	B1	S	DH	DI1	DN	N					
14	1a	7.5	12.5	—	0-16	35	11	13	10	1.5	30	10	30	—	M4	5	1.5		
19	1a	10	17	—	0-24	66	25	16	12	2.0	40	18	40	—	M5	10	2		
24	1a	35	60	—	0-28	78	30	18	14	2.0	56	27	56	—	M5	10	2		

ROTEX® Aluminium diecast (AI-D)																	
19	1a	10	17	—	6-19 19-24	66	25	16	12	2	41	18	32 41	20	M5	10	2
24	1a	35	60	—	9-24 22-28	78	30	18	14	2	56	27	40 56	24	M5	10	2
28	1a	95	160	—	10-28 28-38	90	35	20	15	2.5	66	30	48 66	28	M8	15	10

ROTEX® Aluminium (AI-H)																	
5	1a	0.5	0.9	-	0-6	15	5	5	4	0.5	10	-	-	-	M2	2.5	-
7	1a	1.2	2.0	2.4	0-7	22	7	8	6	1.0	14	-	-	-	M3	3.5	-
9	1a	3.0	5.0	6.0	0-11	30	10	10	8	1.0	20	7.2	-	-	M4	5	1.5
12	1a	5.0	9.0	12	0-12	34	11	12	10	1.0	25	8.5	-	-	M4	5	1.5
14	1a	7.5	12.5	16	0-16	35	11	13	10	1.5	30	10.5	-	-	M4	5	1.5
19	1a	10	17	26	0-24	66	25	16	12	2.0	40	18	-	-	M5	10	2
24	1a	35	60	75	0-28	78	30	18	14	2.0	55	27	-	-	M5	10	2
28	1a	95	160	200	0-38	90	35	20	15	2.5	65	30	-	-	M8	15	10
38	1a	190	325	405	0-45	114	45	24	18	3.0	80	38	-	-	M8	15	10
42	1a	265	450	560	0-55	126	50	26	20	3.0	95	46	-	-	M8	20	10
48	1a	310	525	655	0-62	140	56	28	21	3.0	105	51	-	-	M8	20	10

The coupling is provided with a ROTEX® GS spider as a standard (ROTEX® standard spider available, if requested).

ROTEX® Cast iron (GJL)																	
38	1a	190	325	405	12-40 38-48	114	45	24	18	3	80	38	66 78	37 62	M8	15	10
42	1a	265	450	560	14-45 42-55	126	50	26	20	3	95	46	75 94	40 65	M8	20	10
48	1a	310	525	655	15-52 48-62	140	56	28	21	3.5	105	51	85 104	45 69	M8	20	10
55	1a	410	685	825	20-60 55-74	160	65	30	22	4	120	60	98 118	52	M10	20	17
65	1	625	940	1175	22-70	185	75	35	26	4.5	135	68	115	61	M10	20	17
75	1	1280	1920	2400	30-80	210	85	40	30	5	160	80	135	69	M10	25	17
90	1	2400	3600	4500	40-100	245	100	45	34	5.5	200	100	160	81	M12	30	40


ROTEX® Nodular iron (GJS)																	
100	1	3300	4950	6185	50-115	270	110	50	38	6	225	113	180	89	M12	30	40
110	1	4800	7200	9000	60-125	295	120	55	42	6.5	255	127	200	96	M16	35	80
125	1	6650	10000	12500	60-145	340	140	60	46	7	290	147	230	112	M16	40	80
140	1	8550	12800	16000	60-160	375	155	65	50	7.5	320	165	255	124	M20	45	140
160	1	12800	19200	24000	80-185	425	175	75	57	9	370	190	290	140	M20	50	140
180	1	18650	28000	35000	85-200	475	195	85	64	10.5	420	220	325	156	M20	50	140

■ = Unless any material is specified in the order, it is defined with the calculation/order.


¹⁾ Maximum torque of the coupling T_{K max} = rated torque of the coupling T_{KN} x 2. For selection please see page 14 et seqq.

Ordering example:	ROTEX® 38	GJL	92 ShA	1a	Ø45	1	Ø25
	Coupling size	Material	Spider hardness	Component	Finish bore	Component	Finish bore


Components

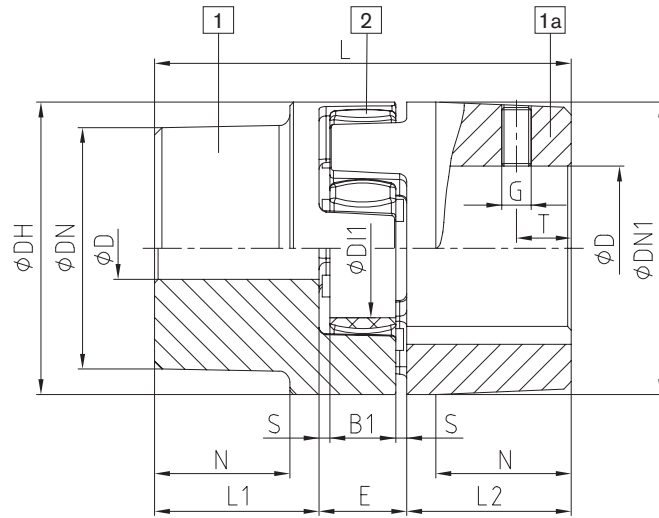

AI-D (thread opposite the keyway)

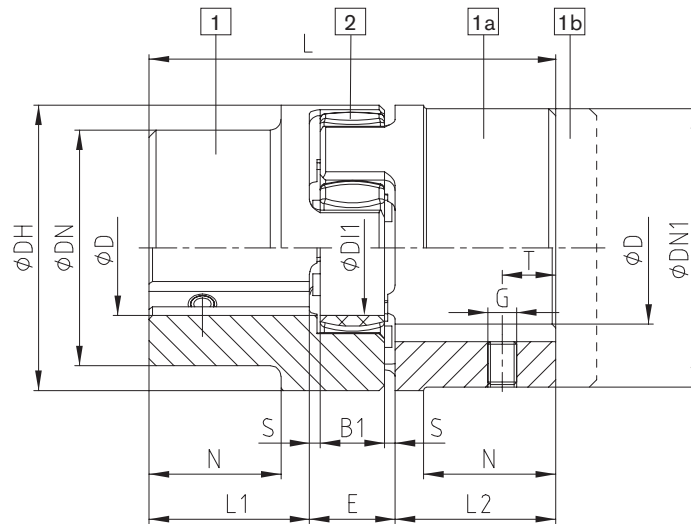


GJL / GJS (thread on the keyway)

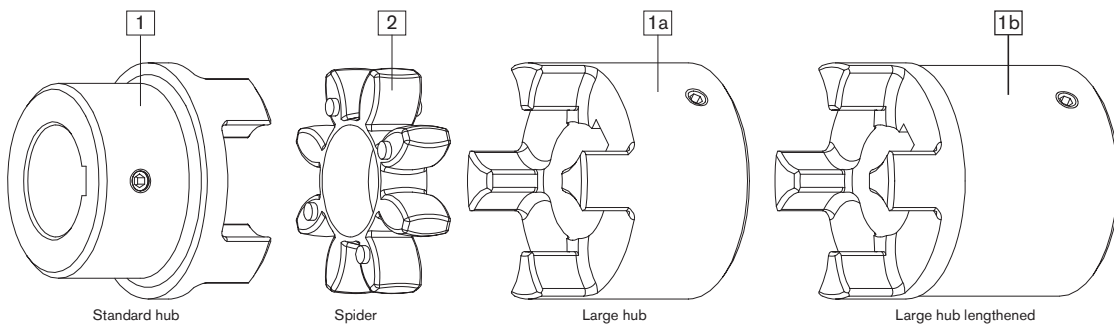

ROTEX® Standard Flexible jaw couplings

Material steel/stainless steel

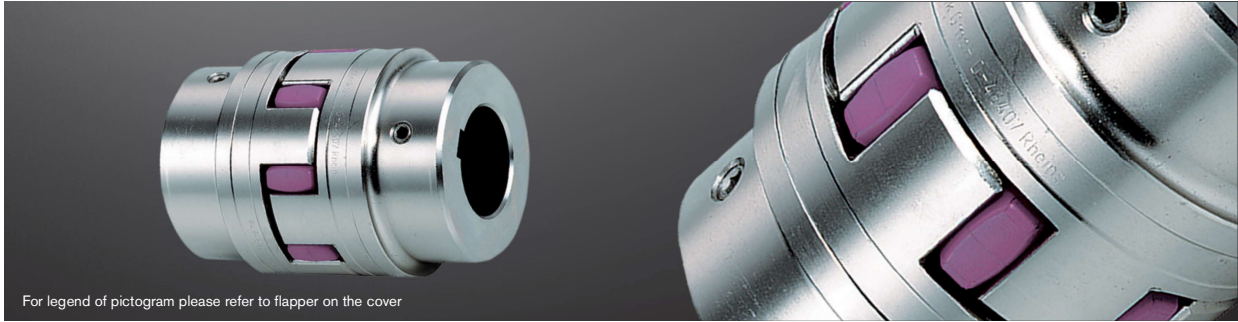

For legend of pictogram please refer to flapper on the cover



ROTEX® Steel (St)																		
Size	Component	Spider ¹⁾ (component 2) Rated torque [Nm]			Finish bore D (min. - max.)	Dimensions [mm]										Setscrew		
		92 ShA	98 ShA	64 ShD		General										G	T	T _A [Nm]
						L	L1, L2	E	B1	S	DH	DI1	DN	N				
14	1a	7.5	12.5	16	0-16	35	11	13	10	1.5	30	10	30	—	M4	5	1.5	
	1b					50	18.5											
19	1a	10	17	21	0-25	66	25	16	12	2	40	18	40	—	M5	10	2	
	1b					90	37											
24	1a	35	60	75	0-35	78	30	18	14	2	55	27	55	—	M5	10	2	
	1b					118	50											
28	1a	95	160	200	0-40	90	35	20	15	2.5	65	30	65	—	M8	15	10	
	1b					140	60											
38	1	190	325	405	0-48	114	45	24	18	3	80	38	70	27	M8	15	10	
	1b					164	70						80	—				
42	1	265	450	560	0-55	126	50	26	20	3	95	46	85	28	M8	20	10	
	1b					176	75						95	—				
48	1	310	525	655	0-62	140	56	28	21	3.5	105	51	95	32	M8	20	10	
	1b					188	80						105	—				
55	1	410	685	825	0-75	160	65	30	22	4	120	60	110	37	M10	20	17	
	1b					210	90						120	—				
65	1	625	940	1175	0-80	185	75	35	26	4.5	135	68	115	47	M10	20	17	
	1b					235	100						135	—				
75	1	1280	1920	2400	0-95	210	85	40	30	5	160	80	135	53	M10	25	17	
	1b					260	110						160	—				
90	1	2400	3600	4500	0-110	245	100	45	34	5.5	200	100	160	62	M12	30	40	
	1b					295	125						200	—				
100	1	3300	4950	6185	0-115	270	110	50	38	6	225	113	180	89	M12	30	40	
110	1	4800	7200	9000	0-125	295	120	55	42	6.5	255	127	200	96	M16	35	80	
125	1	6650	10000	12500	60-145	340	140	60	46	7	290	147	230	112	M16	40	80	
140	1	8550	12800	16000	60-160	375	155	65	50	7.5	320	165	255	124	M20	45	140	
160	1	12800	19200	24000	80-185	425	175	75	57	9	370	190	290	140	M20	50	140	
180	1	18650	28000	35000	85-200	475	195	85	64	10.5	420	220	325	156	M20	50	140	

■ = Unless any material is specified in the order, it is defined with the calculation/order.

¹⁾ Maximum torque of the coupling $T_{K \max}$ = rated torque of the coupling T_{KN} x 2. For selection please see page 14 et seqq.

ROTEX® Stainless steel																		
Size	Material	Spider (component 2) Rated torque [Nm]			Finish bore D (min. - max.)	Dimensions [mm]										Setscrew		
		92 ShA	98 ShA	64 ShD		General										G	T	T _A [Nm]
						L	L1, L2	E	B1	S	DH	DI1	DN	N				
19	1.4305	10	17	21	0-25	66	25	16	12	2	40	18	40	-	M5	10	2	
24	1.4305	35	60	75	0-35	78	30	18	14	2	55	27	55	-	M5	10	2	
28	1.4305	95	160	200	0-40	90	35	20	15	2.5	65	30	65	-	M8	15	10	
38	1.4305	190	325	405	0-48	114	45	24	18	3	80	38	70	27	M8	15	10	
42	1.4305	265	450	560	0-55	126	50	26	20	3	95	46	85	28	M8	20	10	
48	1.4305	310	525	655	0-62	140	56	28	21	3.5	105	51	95	32	M8	20	10	



Material 1.4571 on request.

Ordering example:	ROTEX® 38	1.4305	92 ShA	1 - Ø45	1 - Ø25
	Coupling size	Material	Spider hardness	Component Finish bore	Component Finish bore

ROTEX® Flexible jaw couplings

DIN EN 10204 - 3.1 and 3.2 material test certificate

Components

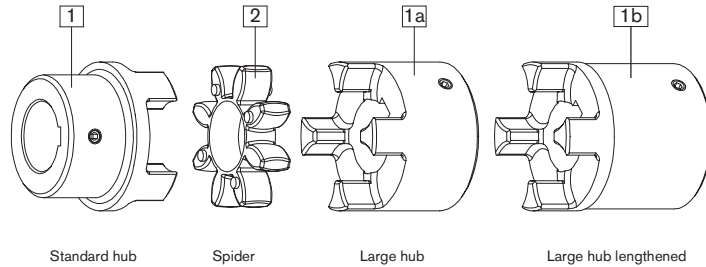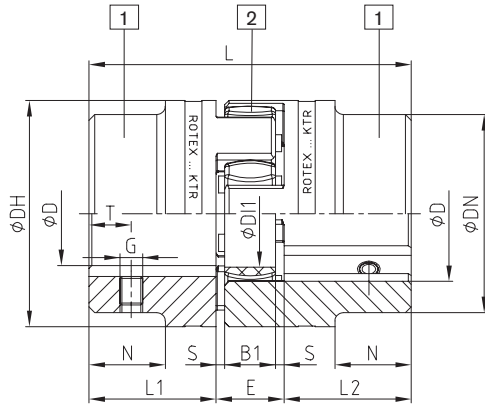

Steel (thread on the keyway)

ROTEX® Coupling hubs with test certificate ¹⁾					
Size	Component	Material ²⁾	Inspection certificate acc. to DIN EN 10204	Notch impact strength	
19	1a	S355 ²⁾	3.1	>=27 J	
24	1a	S355 ²⁾	3.1	>=27 J	
28	1a	S355 ²⁾	3.1	>=27 J	
38	1a	S355 ²⁾	3.1	>=27 J	
42	1	S355 ²⁾	3.1	>=27 J	
48	1	S355 ²⁾	3.1	>=27 J	
55	1	S355 ²⁾	3.1	>=27 J	
65	1	S355 ²⁾	3.1	>=27 J	
75	1	S355 ²⁾	3.1/3.2	>=27 J	
		42CrMoS4+QT ³⁾			
90	1	S355 ²⁾	3.1/3.2	>=27 J	
		42CrMoS4+QT ³⁾			
100	1	S355 ²⁾	3.1/3.2	>=27 J	
		42CrMoS4+QT ³⁾			
110	1	S355 ²⁾	3.1/3.2	>=27 J	
		42CrMoS4+QT ³⁾			
120	1	S355 ²⁾	3.1/3.2	>=27 J	
		42CrMoS4+QT ³⁾			
140	1	S355 ²⁾	3.1/3.2	>=27 J	
		42CrMoS4+QT ³⁾			
160	1	S355 ²⁾	3.1/3.2	>=27 J	
		42CrMoS4+QT ³⁾			
180	1	S355 ²⁾	3.1/3.2	>=27 J	
		42CrMoS4+QT ³⁾			

¹⁾ S355 suitable for feather key connections, 42CrMoS4+QT for oil press-fits

²⁾ Notch impact strength with -40 °C

³⁾ Notch impact strength with -20 °C

Marine programme:

Hub materials S355J2+N and 42CrMo4+QT acc. to DIN EN 10204 - 3.1+3.2, size 75 - 180 available from stock.



ClassNK

UL



Use in fire pumps

ROTEX® couplings comply with the specifications of NFPA 20 standard for the installation of stationary pumps for fire protection and due to completion of the endurance tests required they also comply with the specifications of UL 448A, flexible couplings and connection shafts for stationary fire pumps.

Sizes available:



ROTEX® UL Listed								
Size	Component	Material	Spider (component 2) Rated torque [Nm] 92 ShA	Dimensions [mm]				
				Finish bore D (min. - max.)				
				L	L1, L2	E	DH	
42	1	St	265	18-55	126	50	26	95
55	1	St	410	24-74	160	65	30	120
65	1	St	625	24-80	185	75	35	135
75	1	St	1280	24-95	210	85	40	160
90	1	St	2400	30-110	245	100	45	200

* for complete dimensions see table on page 40